

Product Data Sheet

50077 Lumilux® MB Green SN

Main use Long afterglow products according to DIN 67510 part 4
 Useable for For injection moulding or extrusion of plastics

Typical chemical properties

Composition

ca. 60 % Alkaline earth aluminate + 40 % special wax

Typical physical properties

Product character

granular material

Appearance

yellow-green

Melting range

120 - 150 °C

Bulk density

0.6 kg/l

Typical luminescent properties

Excitation

UV radiation, white light

Color of fluorescence

green

Color of phosphorescence


green

Reference criterion to DIN 67510

min. 290/40-3500-W-K

as determined by part 1


Typical decay curve

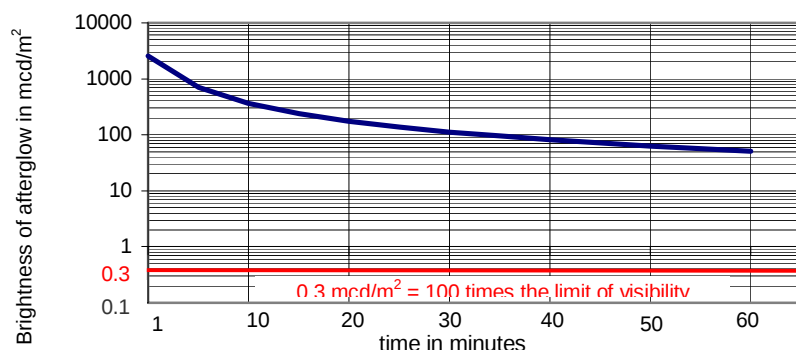

Typical intensity of afterglow
according to the German norm DIN 67510-1:
 Photoluminescent pigments and products - Part 1:
 Measurement and marking at the producer

after 10 minutes	290 mcd/m ²
after 60 minutes	40 mcd/m ²

Typical excitation (left) and phosphorescence (right) spectra

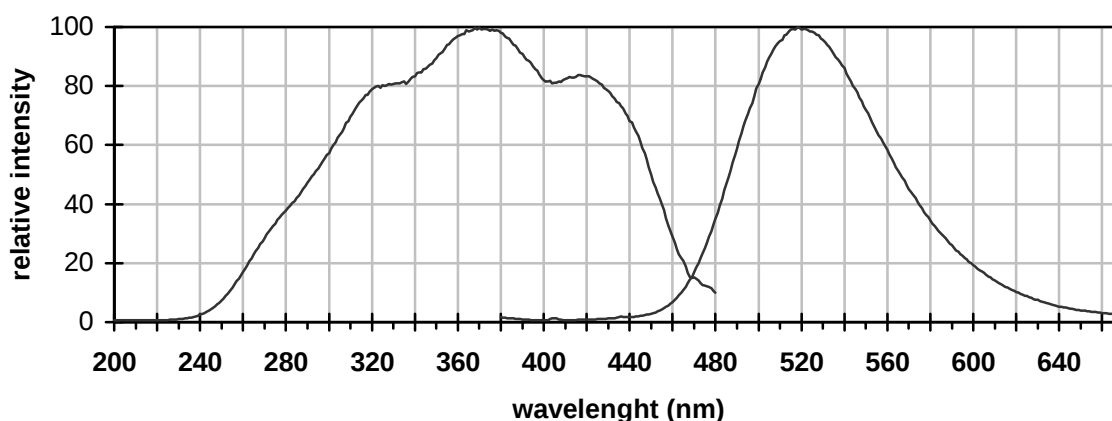

Lumilux® is a registered trademark of Honeywell International Inc.

Disclaimer: Although all statements and information in this Product Data Sheet are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied, and risks and liability for results obtained by use of the products or application of the suggestions described are assumed by the user. Statements or suggestions concerning possible use of the products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that toxicity data and safety measures are indicated or that other measures may not be required. Further information concerning safe handling procedures can be obtained at <http://www.honeywell.com/sites/sm/lumilux> or by contacting Honeywell.

Heavy metals content in pigment			Permitted by DIN EN 71-3 : 1994 (with the exception of modelling clay and finger paint) soluble in 0,07 mol/l HCl	
Arsenic	max.	10 ppm	max.	25 ppm
Barium	max.	1000 ppm	max.	1000 ppm
Chromium	max.	20 ppm	max.	60 ppm
Cadmium	max.	20 ppm	max.	75 ppm
Lead	max.	90 ppm	max.	90 ppm
Antimony	max.	20 ppm	max.	60 ppm
Selenium	max.	50 ppm	max.	500 ppm
Mercury	max.	10 ppm	max.	60 ppm

Remark

This wax granular is excellent compatible with nonpolar and also polar plastics.

Processing remarks

The Lumilux® MB green SN is very sensitive against shear stress during processing. Therefore high shear rates, which may be caused by the equipment used (e.g. screws with mixing parts), should be avoided.

To achieve a homogeneous distribution of the Lumilux® long afterglow pigment in the carrier material we recommend a continuous feeding of the raw material by gravimetric dosage equipment.

Specialty Materials

Honeywell
P.O. Box 100262
D-30918 Seelze / Germany
Phone : +32-16-391-211
www.honeywell.com

pds_50077_e
August 2010
© 2010 Honeywell International Inc.

Honeywell