


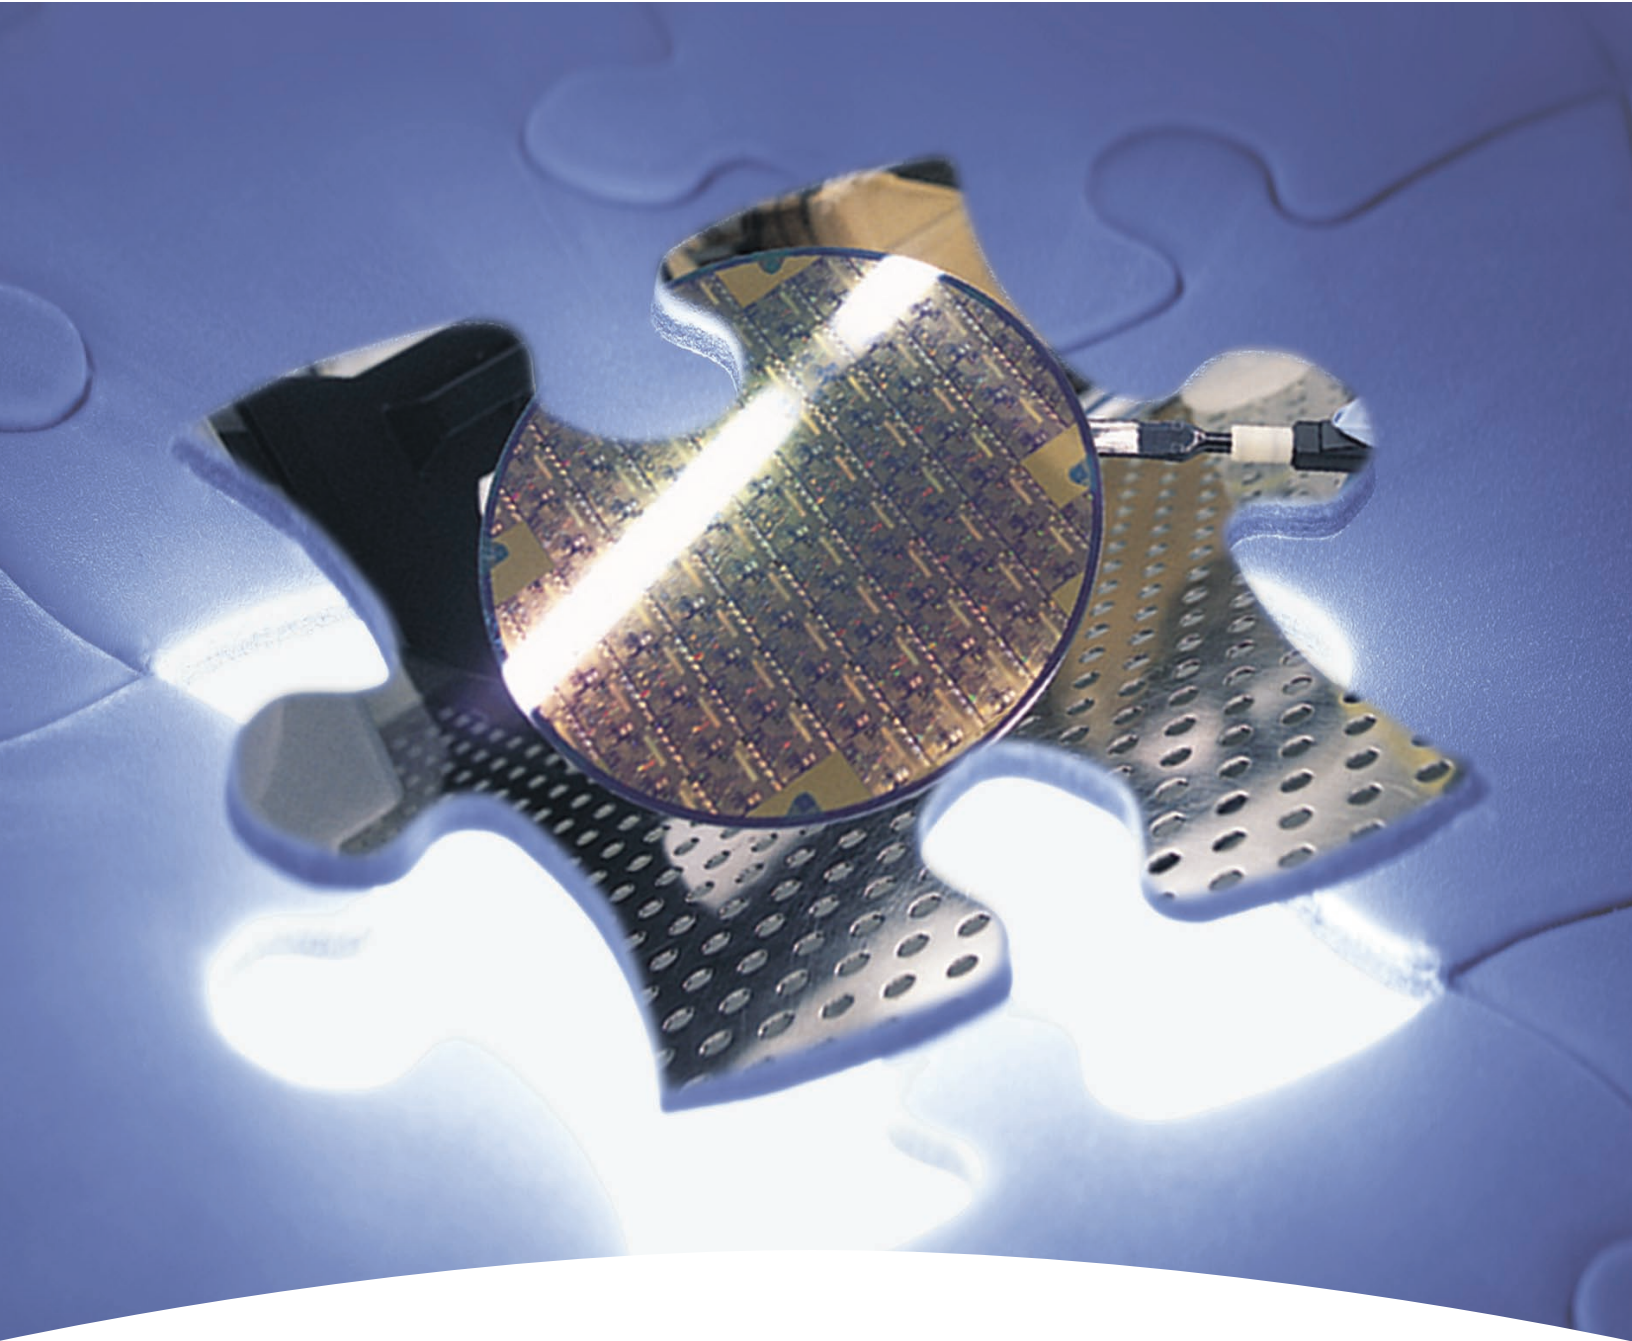

Honeywell
ACCUGLASS® P-5S
Spin-on Glass

Honeywell ACCUGLASS® P-5S Spin-on Glass

ILD AND PMD PLANARIZATION

BENEFITS

- Industry proven performance and broad acceptance in subtractive aluminum processing
- Phosphorus stability up to 900°C
- Thickness variation within a wafer of less than 2%
- Cracking resistance up to 8000Å
- Adhesion to thermal SiO₂, CVD SiO₂ and aluminum

OVERVIEW

The ACCUGLASS P-5S ($\kappa=4.7$) Spin-on Glass (SOG) is a phosphosilicate polymer used for metal and poly planarization, overcoat passivation, and non-etchback interlayer dielectric in the manufacture of integrated circuits. The ACCUGLASS P-5S series also provides Na⁺ gettering ability similar to P-doped CVD oxides.


ACCUGLASS P-5S series contains 2.7 wt% phosphorous bonded to O atoms in the Si-O backbone. The specific formulation results in a stable dielectric constant, <2% within wafer uniformity, and can be densified at temperatures up to 700-900°C with no significant loss of phosphorous.

Thin films of ACCUGLASS P-5S are applied using a commercial coater and cured in a vertical or horizontal furnace to thicknesses up to 1490Å (single coat) and 8000Å (multiple coats).

APPLICATIONS

- ILD and PMD Planarization
- Overcoat Passivation
- Gapfill
- Interlevel Dielectric

ACCUGLASS P-5S is suitable for metal and poly planarization and non-etchback applications in SOG/CVD/SOG sandwich structures. The CVD TEOS creates a stress release for the SOG. ACCUGLASS P-5S can also be used for overcoat passivation.

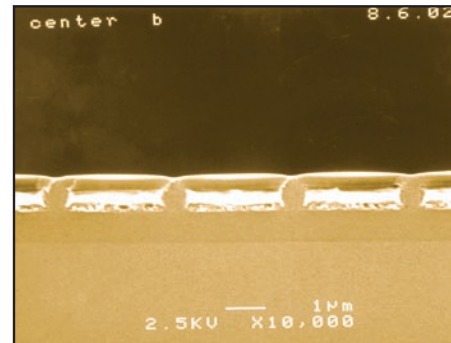

Sandwich of 1500Å Silane / 1600Å P-5S / 1500Å Silane / 1600Å P-5S

FEATURES

Thickness

Product	Thickness Range
P-5S	925Å – 1,490Å


Film Properties Post Cure

Dielectric Constant @ 1 MHz: 4.7
Refractive Index @ 633 nm: 1.48
Coeff. of Thermal Expansion: $5 \times 10^{-6} \text{K}^{-1}$

Material Properties

P-5S Shelf Life @ 4°C: 12 months

Bottle sizes available:
125ml, 250ml, 500ml, 1L, 2L, 4L

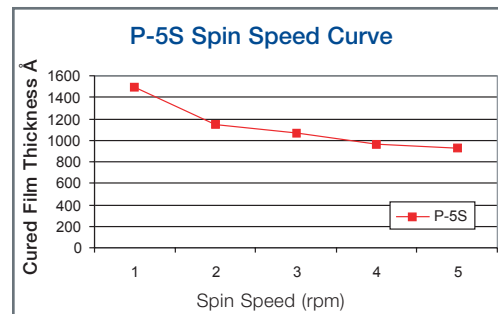

RESPONSIBLE CARE®
OUR COMMITMENT TO SUSTAINABILITY

Honeywell Electronic Materials

USA: 1-509-252-2102

China: 86-21-28942481

Germany: 49-5137-999-9199

Japan: 81-3-6730-7092

Korea: 82-2-3483-5076

Singapore: 65-6580-3593

Taiwan: 886-3-6580300 ext.312

www.honeywell.com/sm/em

Although all statements and information contained herein are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liability for use of the information and results obtained. Statements or suggestions concerning the use of materials and processes are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all toxicity data and safety measures are indicated herein or that other measures may not be required. PB0561011Rev10
©2011 Honeywell International Inc.

Honeywell