


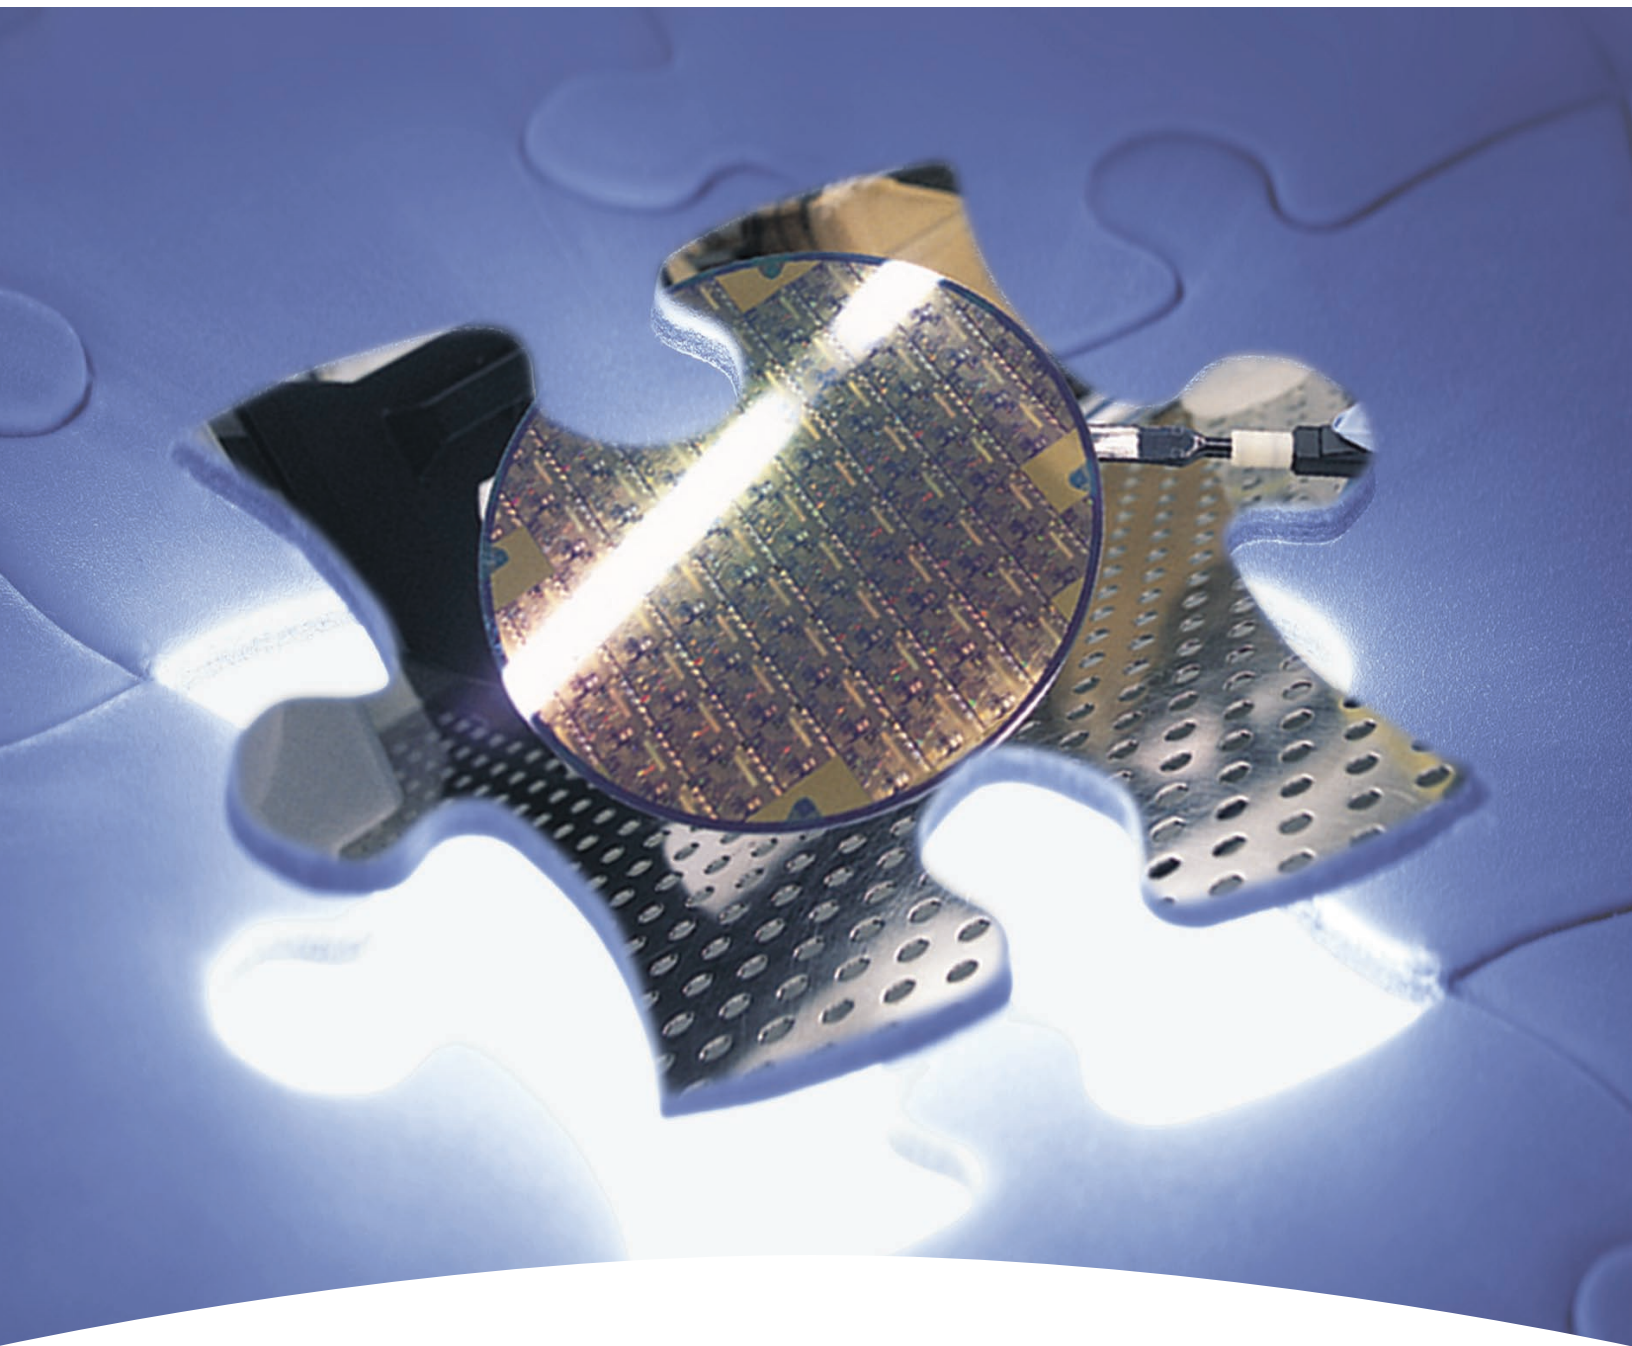


Honeywell DUO™ 248
Anti-Reflective Coating

Honeywell DUO™ 248

A SILICON-RICH BARC FOR SINGLE AND DUAL DAMASCENE, AND OTHER ADVANCED PATTERNING APPLICATIONS

BENEFITS

- Anti-reflective property provides superior CD (critical dimension) control during photoresist patterning
- Organo-siloxane based polymer keeps the as patterned CD intact enabling a wide etch process latitude
- Lower defectivity and higher etch-selectivity than OBARC
- Polymer designed to fill and planarize topography
- Compatible with top-tier 248nm photoresist platforms
- Industry proven technology for damascene patterning

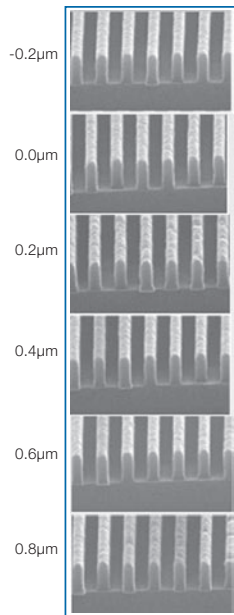

160L/320P

Resist Thickness: 420nm
Dose: 30 mJ
Illumination: NA 0.6, 2/3 Annular
Mask: 6% PSM

Data courtesy of JSR Microelectronics.
Please contact JSR for further process details.

OVERVIEW

DUO248 is designed for use in semiconductor manufacturing to improve and extend KrF photolithography and the plasma etch process. Containing a patented* organo-siloxane ($R_xCH_3SiO_2$) polymer (R = organic chromophore), DUO248 coatings meet the lithographic and etch requirements necessary for the patterning of thin film features within state-of-the-art IC devices. Properties include: bottom anti-reflective coating (BARC) for ArF lithography, and fill planarization of line or via topography.

DUO248 offers excellent plasma etch characteristics. The organo-siloxane polymer comprising DUO248 provides a high degree of plasma etch selectivity to photoresist. Additionally, the organo-

siloxane polymer allows for matched plasma etch selectivity to Low-k SiOCH and FSG dielectric films facilitating Dual Damascene patterning. Such plasma etch selectivity is required for exact transfer of the as patterned photoresist dimensions into the underlying thin films.

DUO248 is selectively removed using appropriate photoresist strip and wet etch chemistries.

Tunable Optical Properties

$$n_{248nm} = 1.49$$

$$k_{248nm} = 0.41$$


Material Stability

Shelf Life @ 5°C: >6 months

Bottle Sizes Available

(NowPak, HDPE, Glass)
250ml, 500ml, 1L, 2.5L

ADVANCED KrF PHOTORESIST PATTERNING

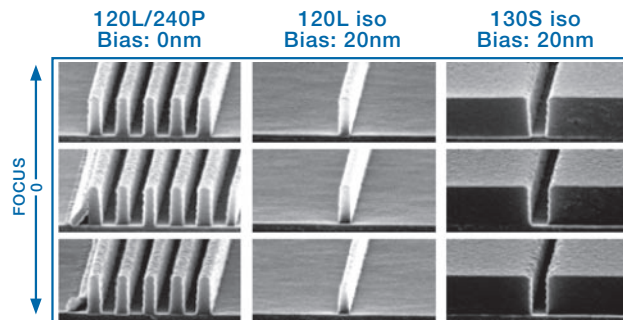

Resist Thickness: 380nm
Dose: 27 mJ
Illumination: NA 0.68, 2/3 Annular
Mask: 6% HT-PSM


Data courtesy of TOK. Please contact TOK for further process details.

A-C: Photoresist and DUO248 Stripped in One Step Using a Commercially Available Cleaning Chemistry

SEM data courtesy of Lam Research Corporation. Please contact Lam Research Corporation for further process details.


VFTL DUAL DAMASCENE PATTERNING

$K = 2.7$ CVD SiOCH, DUO248 as the Via Fill Material

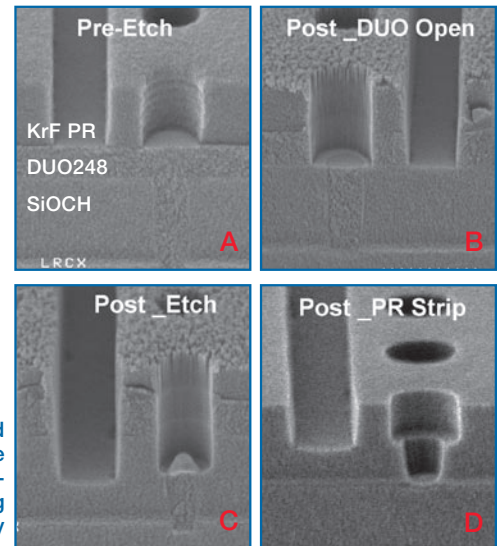

LEGEND

- A Pre-etch (post KrF PR patterning)
- B DUO248 open-etch
- C Trench etch into SiOCH dielectric
- D Post clean. VFTL Dual Damascene patterning completed
- E Post clean. VFTL Dual Damascene patterning completed



RESPONSIBLE CARE®
OUR COMMITMENT TO SUSTAINABILITY

Honeywell Electronic Materials

USA: 1-509-252-2102

China: 86-21-28942481

Germany: 49-5137-999-9199

Japan: 81-3-6730-7092

Korea: 82-2-3483-5076

Singapore: 65-6580-3593

Taiwan: 886-3-6580300 ext.312

www.honeywell.com/sm/em

Although all statements and information contained herein are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liability for use of the information and results obtained. Statements or suggestions concerning the use of materials and processes are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all toxicity data and safety measures are indicated herein or that other measures may not be required. *Honeywell U.S. Patents 6,268,457 B1; 6,506,497 B1; 6,956,097 B2; 7,012,125 B2
©2011 Honeywell International Inc. PB0731011Rev12

Honeywell