

PTM7900


HIGH THERMAL CONDUCTIVITY PHASE CHANGE MATERIAL

Solstice's PTM7900 series, a super highly thermally conductive Phase Change Material (PCM) in both pad and paste formats, is designed to minimize thermal resistance at interfaces, maintain excellent performance through reliability testing, and provide scalable application at a competitive cost.

Based on a novel polymer PCM system, this material exhibits excellent interface wettability during typical operating temperature ranges, resulting in extremely low surface contact resistance.

A proprietary material provides superior reliability (pass 150°C baking 1000 hours, T/C-B 1000 cycles) and maintains low thermal impedance (<0.045°Ccm²/W @ no shim), making the PTM7900 series desirable for high performance integrated circuit devices.

PTM7900 Thermal Impedance (TI) vs. Pressure

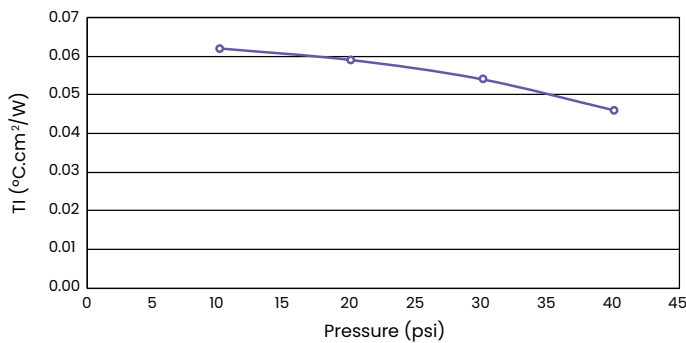

PTM7900 is ideal for high performance IT/Enterprise computing applications.

FEATURES & BENEFITS

- High performance filler and polymer technology
- Phase change at 45°C
- Highly conductive filler loading to optimize performance
- Superior handling and reworkability
- Superior reliable thermal performance
- Available in both pad and paste formats

Solstice TIMs Serve Multiple Applications



Automotive & Power



IT/Enterprise



Telecomm




Consumer Electronics



High-Brightness LED

PTM7900 TECHNICAL INFORMATION

PHYSICAL PROPERTIES	UNIT	TEST METHOD	PTM7900	PTM7900-SP
Thermal Conductivity	W/m-K	ASTM D5470	8.0	8.0
Thermal Impedance @ no shim	°Ccm ² /W	ASTM D5470 Modified	0.045	0.045
Specific Gravity	g/cm ³	ASTM D374	2.8	2.5
Viscosity	Pa·s @ 2 l/s, 25°C	Rheometer	NA	177
Volume Resistivity	Ω·cm	ASTM D257-700	2.1x10 ¹⁴	2.1x10 ¹⁴
Thickness Range	mm		0.20-1.00	NA

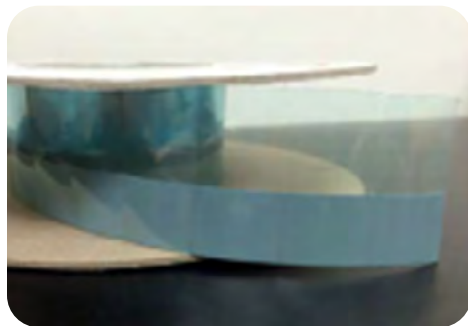

PTM7900 is available in both pad and paste/printable formats.



STORAGE CONDITION

Refer to product label.

THERMAL IMPEDANCE POST RELIABILITY (ASTM E1461)

End of Line	0.045°C-cm ² /W
Bake 150°C, 3000 h	0.045°C-cm ² /W
HAST, 192 h	0.045°C-cm ² /W
Temperature Cycling "B" (-55°C to +125°C, 4000 cycles)	0.045°C-cm ² /W

Product Use

Clamping pressure and temperature are suggested to achieve a minimum bond line thickness of the thermal interface material, typically less than 1.5 mil (0.038mm) for best performance. The material must go through the phase change temperature to exhibit entitlement performance.

More Solstice TIMs

PTM7900 is part of Solstice's TIM Solutions family of phase change materials. Whatever the thermal challenge, we offer a TIM product that provides just the right characteristics for your application. Find out more about:

PTM7000 Series	PTM6000 Series
PTM5000 Series	PCM45F Series
HT Series	LTM Series

by visiting electronic-materials.com



All statements and information provided herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, express or implied. Statements regarding possible uses of our products are provided for informational purposes only and do not constitute a representation or warranty. Users remain responsible for evaluating all safety and environmental considerations. Any descriptions of future products, intended updates, or improved features or functions do not constitute a commitment by Solstice to develop, sell, or release such products, updates, features, or functions, as such decisions remain in our sole discretion. © 2026 Solstice Advanced Materials US, Inc.



For More Information Visit solstice.com

Solstice Advanced Materials Inc.
115 Tabor Rd. | Morris Plains, NJ 07950



© 2026 Solstice Advanced Materials Inc.
6315003-esm-tds-ptm7900-ltr-en | SOLS | 06/26