

HLT2000 and HLT3500


THERMALLY CONDUCTIVE GEL

Solstice's HLT2000 and HLT3500 are two-part, dispensable thermally conductive gel, which offer long-term reliability and superior softness. The enhanced bonding force between the polymer base and the filler largely improves the thermally conductive gel oil separation issue in storage. Prior to curing, the material maintains good thixotropic characteristics and low viscosity to be easily dispensed. The product can be cured in short time after two-component mixing at room temperature. The high compressibility minimizes thermal resistance at interfaces, while maintaining excellent performance during reliability testing.

STORAGE & USE: Shelf life 6 months at 23±2°C

BENEFITS & FEATURES

- Low contact resistance
- Easy to dispense and rework
- High compressibility for low stress applications
- Long-term reliability
- Less oil separation
- No pump out and cracking

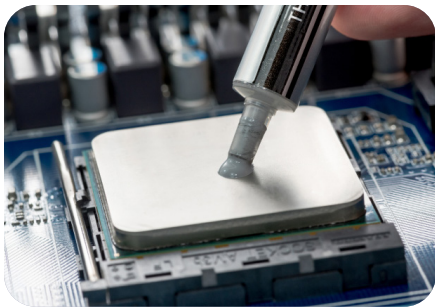

Typical Applications

- Consumer electronics
- Telecommunications equipment
- Automotive electronics
- Memory & power modules

PROPERTY	HLT2000	HLT3500	TEST METHOD
Specific Gravity	2.8	3.2	ASTM D792
Viscosity (cps@25°C)	200,000-350,000	300,000-450,000	ASTM D2196 (Brookfield Viscometer, #7 spindle, 10rpm)
Hardness (Shore00)	50	50	ASTM D2240
Thermal Conductivity (W/m·K)	2.0	3.5	ASTM D5470
Thermal Impedance (°C·in²/W) (Imm@10psi) (Typical Value)	0.66	0.44	ASTM D5470
Cure Schedule	25°C (hr)	10	12
	100°C (min)	30	30
Color	Part A: Yellow Part B: White	Part A: White Part B: Blue	Visual



For More Information Visit
solstice.com

Solstice Advanced Materials Inc.
115 Tabor Rd. | Morris Plains, NJ 07950

