

SOLSTICE® 452A (R-452A)

TECHNICAL DATA SHEET

Solstice® 452A (R-452A) is a non-ozone depleting, nonflammable, zeotropic blend designed for low and medium temperature applications in existing and new systems.

Solstice 452A is an excellent refrigerant option for direct expansion refrigeration low- and medium-temperature applications, including commercial and industrial refrigeration, condensing units, plug-ins and transport refrigeration like trucks and trailers, powered vans or reefer containers. With 45 % GWP reduction (IPCC 4) and close performance to R-404A, end-users can combine the same capacity and efficiency with more sustainable performance and lower environmental impact.

As a lower global-warming-potential (GWP) alternative to R-404A and R-507, Solstice 452A matches the compressor discharge temperature of R-404A and R-507 at both low and medium temperature conditions, helping to further minimize application and retrofit costs. Plus, it provides a close capacity match to R-404A and similar energy efficiency.

GENERAL PROPERTIES	
Class/Type	Zeotropic Blend
Formula	30 % / 11 % / 59 % R-1234yf / R-32 / R-125
Kind	HFC / HFO
Appearance	Colorless
ODP (ODP-R11=1)	0
GWP rev/4th IPCC (GWP rev/5th IPCC)	2.140 (1.945)
ASHRAE Standard 34 Class	A1
REACH	Registered

UNITS	
Molecular weight	103.5 lbm / lbm
Boiling temperature	-52.6°F
Critical temperature	168.2°F
Critical pressure	582.29 psia
Critical volume	0.293 ft³/lb
Critical density	31.64 lbm/ft³
Vapor density at boiling point	0.3 lb/ft³
Liquid density at 32°F	77.22 lb/ft³
Liquid density at 77°F	70.26 lb/ft³
Vapor density at 77°F	4.0 lb/ft³
Liquid heat capacity at 77°F	0.3513 Btu/lb-°F
Vapor heat capacity at 77°F	0.2635 Btu/lb-°F
Vapor pressure at 77°F	172.3 psia
Liquid thermal conductivity at 77°F	0.039 Btu / h-ft-°F
Vapor thermal conductivity at 77°F	0.0009 Btu/h-ft-°F
Liquid viscosity at 77°F	0.3287 lb/ft-hr
Vapor viscosity at 77°F	0.031 lb/ft-hr

BENEFITS

- Mimics R-404A performance
- Similar discharge temperature to R-404A and R-507
- Similar mass flow to R-404A and R-507
- Direct replacement for R-404A and R-507
- Known system technology
- Similar service standards as R-404A
- Same skills for technicians
- Similar storage and handling requirements to R-404A

APPLICATIONS

- Low and medium temperature commercial and industrial refrigeration systems
- Retail food condensing units
- Plug-ins
- Refrigerated transport



SAFETY AND STORAGE

Solstice Advanced Materials recommends reading the Safety Data Sheet (SDS) before using the product. Solstice 452A is a nonflammable refrigerant (ASHRAE class A1). Solstice 452A has similar storage and handling requirements to R-404A in bulk and cylinder, since according to the compressed gas classification it is nonflammable.

MATERIALS COMPATIBILITY

Solstice does not recommend the use of chlorinated solvents to clean refrigeration systems or components.

DESICCANTS

Desiccant driers compatible with Solstice 452A are commercially available. Contact individual

drier manufacturers for specific recommendations.

LUBRICANTS

Polyolester (POE) oil is recommended for using Solstice 452A. Compressor manufacturers typically qualify specific lubricants for use with their products. Users should check with the equipment manufacturer for the recommended lubricants for their system.

PLASTICS AND ELASTOMERS


Solstice 452A is compatible with most common materials. Since there are many different grades and formulations of these materials, we recommend that compatibility testing be performed on the specific grade of materials under consideration and at the conditions of use when designing new systems. Customers should consult the

manufacturer or conduct further independent testing.

LEAK DETECTION

If a large release of Solstice 452A Vapor occurs, take the same measures as you would with R-404A. Hand-held leak detectors can be used for pinpointing leaks. For monitoring an entire room on a continual basis, leak monitors are available. Leak detection is important for protection of those in proximity of the system, refrigerant conservation, equipment protection and performance, and reduction of emissions. Customers should consult the equipment manufacturer for appropriate detectors.

PRESSURE AND ENTHALPY

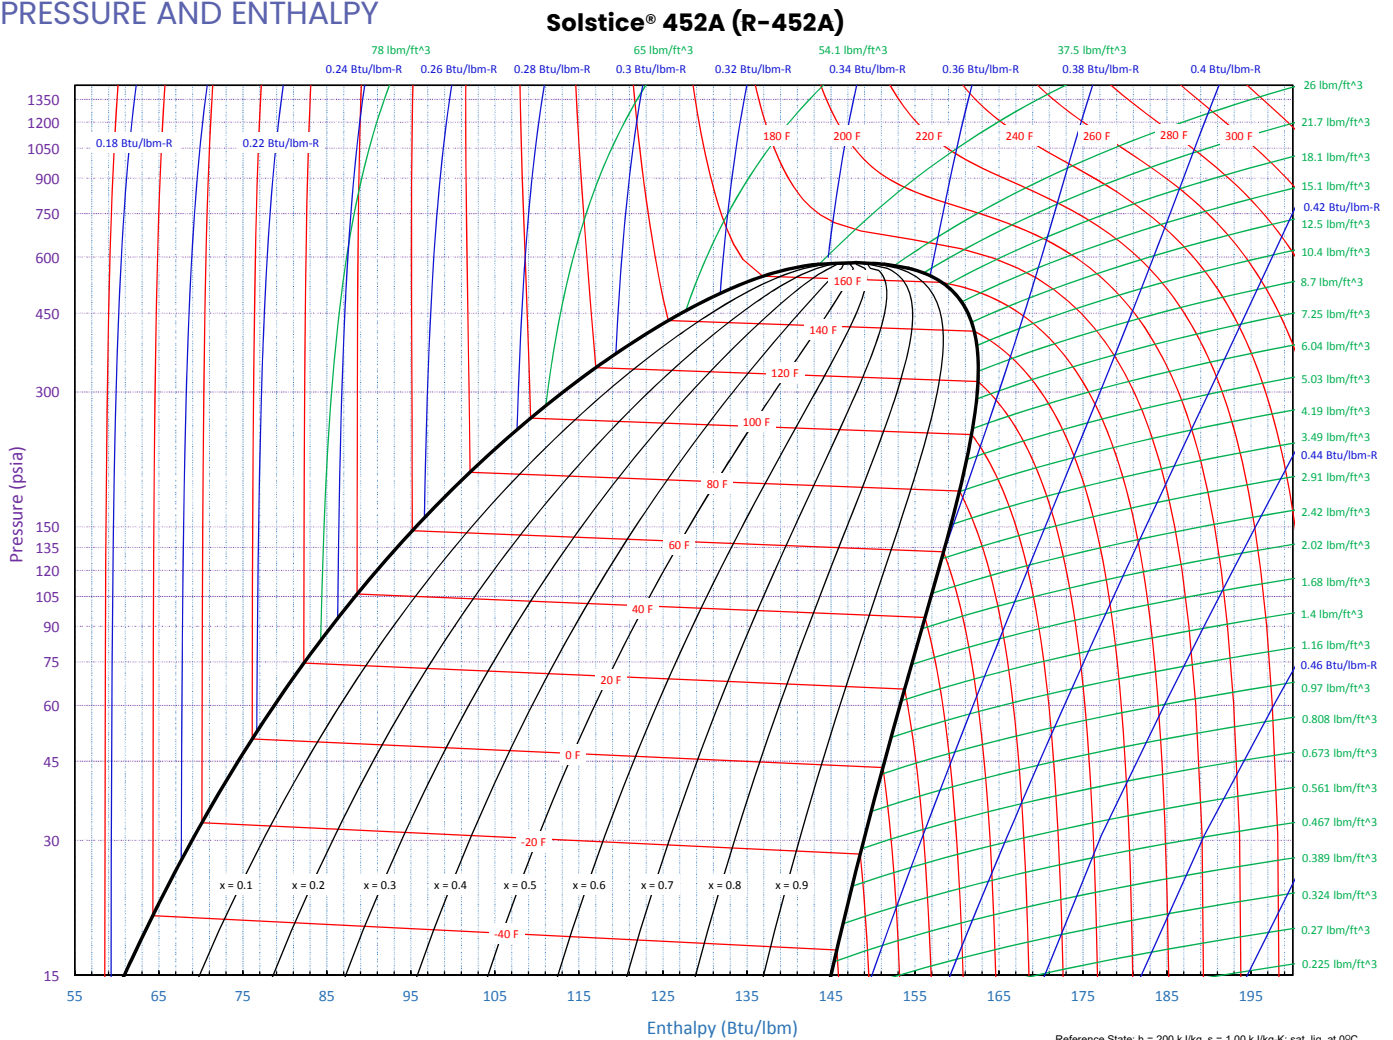

PRESSURE AND TEMPERATURE

R-452A			
Pressure (PSIG)	Average Temperature (°F)	Liquid (Bubble) Temperature (°F)	Vapor (Dew) Temperature (°F)
0	-49.1	-52.5	-45.7
5	-37.8	-41.3	-34.4
10	-28.7	-32.2	-25.2
15	-20.9	-24.4	-17.4
20	-14.0	-17.5	-10.5
25	-7.9	-11.4	-4.4
30	-2.3	-5.8	1.2
35	2.8	-0.7	6.3
40	7.5	4.0	11.1
45	11.9	8.4	15.5
50	16.1	12.6	19.6
55	20.0	16.5	23.5
60	23.7	20.2	27.2
65	27.2	23.7	30.7
70	30.6	27.0	34.1
75	33.8	30.2	37.3
80	36.8	33.3	40.3
85	39.8	36.3	43.3
90	42.6	39.1	46.1
95	45.4	41.9	48.9
100	48.0	44.6	51.5
105	50.6	47.1	54.1
110	53.1	49.6	56.5
115	55.5	52.1	58.9
120	57.8	54.4	61.3
125	60.1	56.7	63.5
130	62.3	58.9	65.8
135	64.5	61.1	67.9
140	66.6	63.2	70.0
145	68.7	65.3	72.1
150	70.7	67.3	74.1
155	72.7	69.3	76.0
160	74.6	71.3	77.9
165	76.5	73.2	79.8
170	78.3	75.0	81.6
175	80.1	76.8	83.4
180	81.9	78.6	85.2
185	83.6	80.4	86.9
190	85.3	82.1	88.6
195	87.0	83.8	90.2
200	88.7	85.5	91.9
205	90.3	87.1	93.5

R-452A			
Pressure (PSIG)	Average Temperature (°F)	Liquid (Bubble) Temperature (°F)	Vapor (Dew) Temperature (°F)
210	91.9	88.7	95.0
215	93.4	90.3	96.6
220	95.0	91.8	98.1
225	96.5	93.4	99.6
230	98.0	94.9	101.1
235	99.4	96.4	102.5
240	100.9	97.8	104.0
245	102.3	99.3	105.4
250	103.7	100.7	106.7
255	105.1	102.1	108.1
260	106.5	103.5	109.5
265	107.8	104.8	110.8
270	109.1	106.2	112.1
275	110.4	107.5	113.4
280	111.7	108.8	114.6
285	113.0	110.1	115.9
290	114.3	111.4	117.1
295	115.5	112.7	118.4
300	116.8	113.9	119.6
305	118.0	115.2	120.8
310	119.2	116.4	121.9
315	120.4	117.6	123.1
320	121.5	118.8	124.3
325	122.7	120.0	125.4
330	123.8	121.2	126.5
335	125.0	122.3	127.6
340	126.1	123.5	128.7
345	127.2	124.6	129.8
350	128.3	125.7	130.9
355	129.4	126.8	131.9
360	130.5	127.9	133.0
365	131.5	129.0	134.0
370	132.6	130.1	135.0
375	133.6	131.2	136.1
380	134.6	132.2	137.1
385	135.7	133.3	138.1
390	136.7	134.3	139.0
395	137.7	135.3	140.0
400	138.7	136.4	141.0
405	139.6	137.4	141.9
410	140.6	138.4	142.9
415	141.6	139.4	143.8



All statements and information provided herein are believed to be accurate and reliable, but are presented without guarantee, warranty or responsibility of any kind, express or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement, and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated herein, or that other measures may not be required. User assumes all liability for use of the information and results obtained.



Solstice Advanced Materials Inc.
solstice.com



© 2026 Solstice Advanced Materials US Inc.
7600001 RAS TDS Solstice 452A 8.5x11 EN | SOLS | 05/26